

[OEWD-XXX]

DWDM Filter (FBG only)

6.25/12.5/25/50/100/200 GHz

Features:

- Best specifications available in the industry
- Centre wavelength on ITU grid, or customer specified
- SM or PM-fibers
- Connector: FC-SC-LC/PC; FC-SC-LC /APC
- Different packages available
- Cost-effective

Applications:

- Add / Drop filters
- Multiplexer / Demultiplexer
- WDM based FBG sensing

Product description:

The DWDM-FBG Fiber Bragg Grating filters have gained more attention because of their flat top and steep spectrum slope. With our unique apodization mask technology and our world class FBG writing technology, DWDM fiber grating filters have been made with more than 40 dB isolation and with a reflection bandwidth at -25dB of less than 1 nm (100 GHz), 0.5 nm (50 GHz), 0.25 nm (25 GHz) and 0.13 nm (12.5 GHz), 0.06 nm (6.25 GHz). Our high quality DWDM fiber grating filter is the best in the industry and shows that it is ideal for any kind of DWDM system applications.


Specifications:

Model number		Unit	OEWD-200	OEWD-100	OEWD-050	OEWD-025	OEWD-012	OEWD-006
Channel spacing		GHz	200	100	50	25	12.5	6.25
FBG central wavelength		nm	ITU grid; Custom: 1250-1675 nm					
Reflection Bandwidth @	-0.5 dB	nm	> 0.6	> 0.3	> 0.15	> 0.08	> 0.04	> 0.02
	-3 dB	nm	< 1.6	< 0.8	< 0.4	< 0.2	< 0.1	< 0.05
	-25 dB	nm	< 2.0	< 1.0	< 0.5	< 0.25	< 0.13	< 0.06
Transmission Bandwidth @	-25 dB	nm	> 0.4	> 0.2	> 0.1	> 0.05	> 0.03	> 0.01
Reflectivity		%	> 99.9					
Channel Isolation*		dB	> 25					
CWL thermal stability**		pm/C°	< 1.0					
Operating temperature		°C	-5 to 50					
Fiber type			SM; PM					
Standard fiber length		m	1.5					


* Higher isolation available on request

** With Athermal package


Sample DWDM-FBG spectrum:

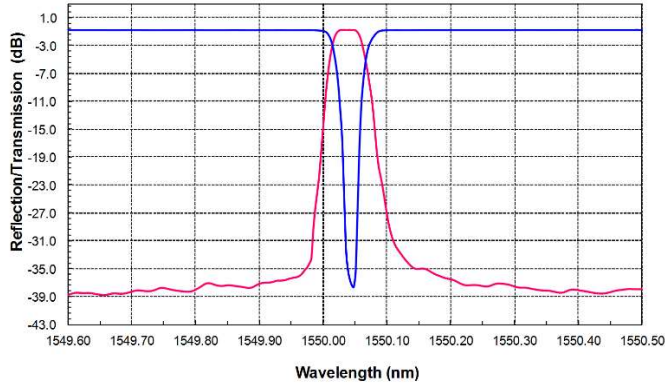


OEDWDM-012 (12.5GHz DWDM FBG)

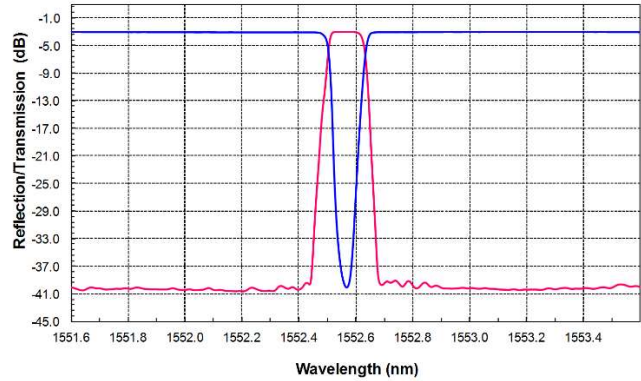


OEDWDM-025 (25GHz DWDM FBG)

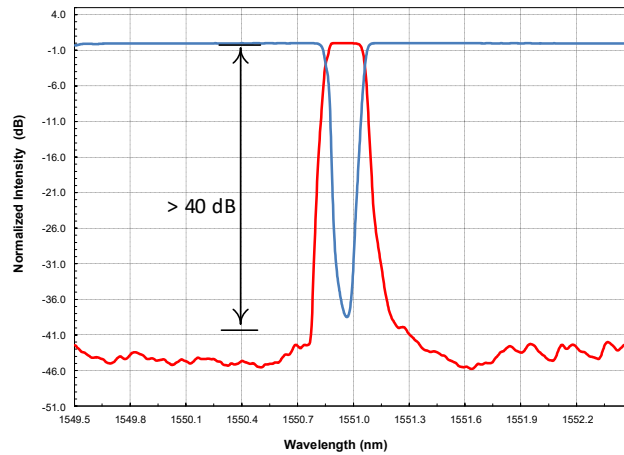

OEDWDM-050 (50GHz DWDM FBG)

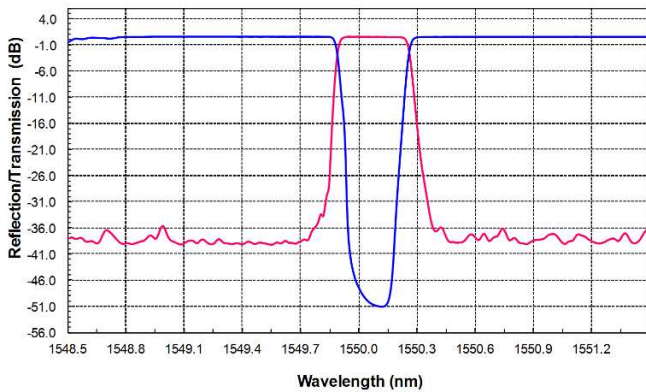

OEDWDM-100 (100GHz DWDM FBG)

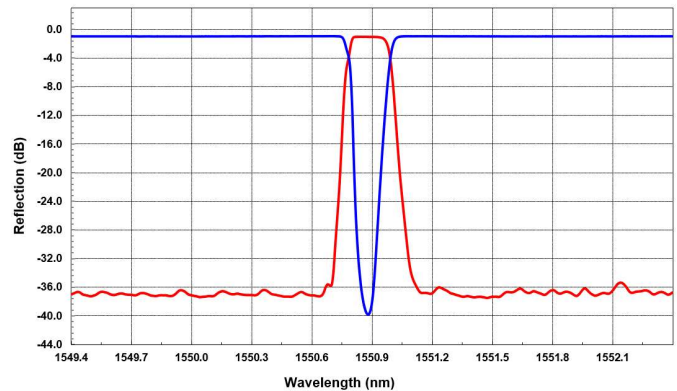

OEDWDM-200 (200GHz DWDM FBG)

Ordering number OEWDM:

Channel spacing	CWL (nm)	Package	Pigtail type	Connector	Fiber Length			
006 (6.25 GHz)	Center Wavelength	Standard	P1	Bare fiber	T1	FC/PC	C1	Default: 1m
012 (12.5 GHz)		Athermal	P2	900 Tubing	T2	FC/APC	C2	Custom: indicate value
025 (25 GHz)		None	P3	3mm Jacket	T3	SC/PC	C3	
050 (50 GHz)						SC/APC	C4	
100 (100 GHz)						LC/PC	C5	
200 (200 GHz)						LC/APC	C6	
Example:	OEWDM-050-1565.5-P1-T2-C3-1.5							

Note: Customers who use Fiber Bragg Gratings (FBGs) or incorporate them with their own products, must buy their FBGs from a licensed manufacturer. O/E LAND INC. has full **License Agreement from CRC/UTC Fiber Bragg Grating Technologies Portfolio.**