

[OEBS-100]

(ASE based)

Broadband Light Sources (530 nm)

Features:

- Wide wavelength range
- ASE
- Low noise
- Turn-key solution
- Cost effective solution

Applications:

- Polarization measurement
- Components/modules testing
- Optical Fiber Sensors
- Biomedical Applications




OEBS-100

Product description:

OEBS-100 is a Broadband Light Sources (CW) based on the Amplified Spontaneous Emission (ASE) principle that uses a laser to pump a Praseodymium (III) fluoride ZBLAN fiber. The broadband light source with output power of few mW can be used for testing optical components, gas sensing, as well as biomedical applications.

| Parameter | Unit | OEBS-100-530 |
|-----------------------|-----------------|----------------|
| Center WL | nm | 530 |
| Bandwidth (-10 dB) | nm | > 30 |
| Output power | mW | > 2 |
| Power stability | % | 5 |
| Polarization state | - | Random; Linear |
| Output fiber type | - | SM; PM |
| Connector | - | FC/APC; custom |
| Operating temperature | °C | 10-50 |
| Dimensions (Turn-key) | mm ³ | 70 x 190 x 310 |

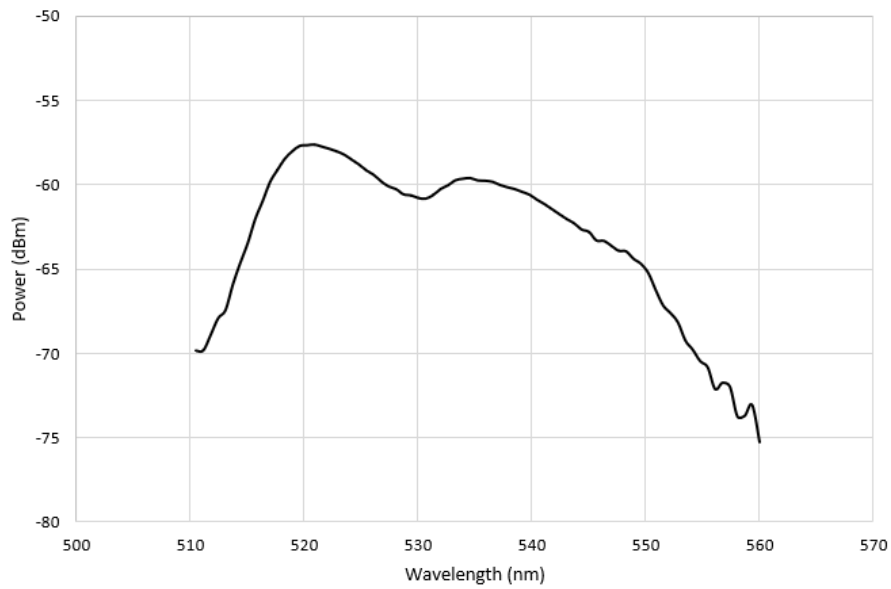

OEBSL-100-530

Ordering number:

| OEBSL-100-WL-P: | WL | P |
|------------------------|-----------------|--------------------|
| | 530 | Average power (mW) |
| Example: | OEBSL-100-530-2 | |