


## OEMOD-LDD-10A Laser Diode Driver

**OEMOD-LDD-10A** Laser diode driver provides precise constant-current laser diode control. It is ideal to drive high power laser diode (LD). The driving current is up to 10A. It is high efficiency laser diode driver with small heat generated.

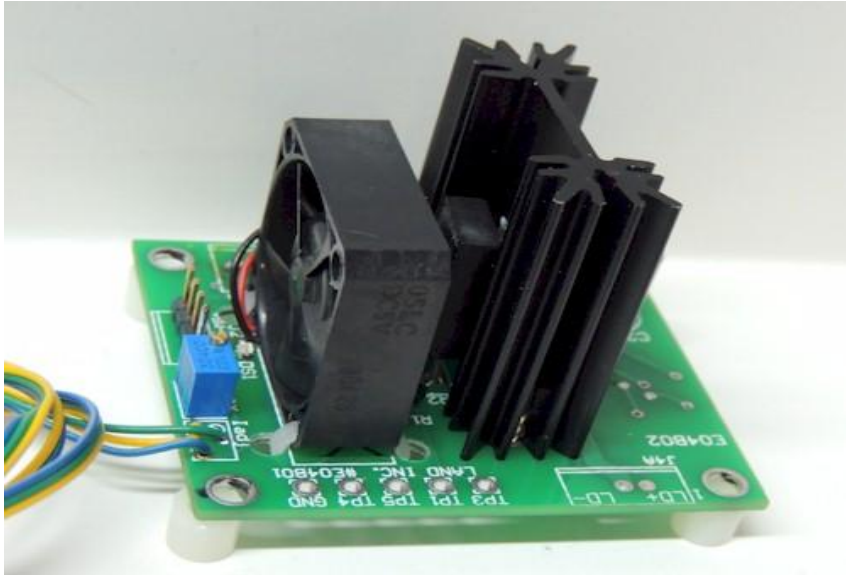

### Features:

- High efficiency laser diode driver
- Operation in constant current mode
- Adjustable up to 10A
- 0.5% or 10mA driving current accuracy
- Over current and slow start protection
- Single +5 V power supply
- Wide operation temperature range

### Specifications:

Maximum laser diode driving current	10A
Driving current accuracy	0.5%
Driving current stability	0.5% or 10mA
Slow-start delay time	200ms
Power supply	+5V
Operation Temperature	-40 ~ +75°C
Size	50mmX60mm

- All specifications are subject to change without notice.

**North Photonics LLC.** L240, CESTM, 251, Fuller Road, Albany, NY, USA, 12203  
Email: [sales@northphotonics.com](mailto:sales@northphotonics.com), Website: [www.northphotonics.com](http://www.northphotonics.com)  
September 2025